

Print Mark Reader


WM03NCT2

Part Number



- Compact housing
- Small light spot
- Teach-in, external teach-in
- White light for recognition of any print mark combinations

These sensors have been specially designed to recognize print marks. They have a very small spot and use a white light LED with long service life. Only one sensor is required for the recognition of all color combinations, as well as the difference in brightness between print marks and the background.

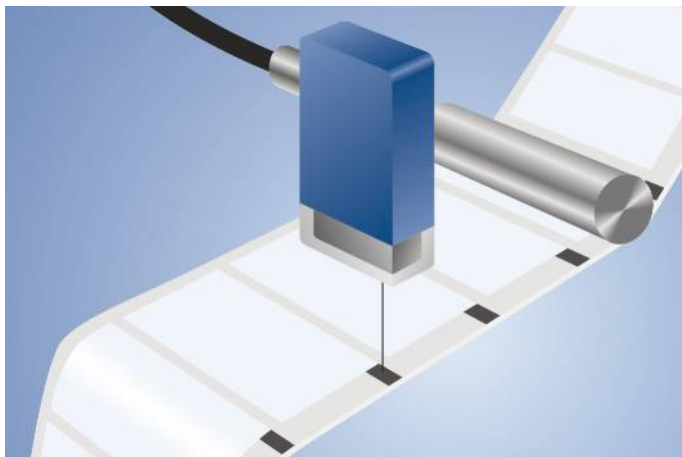

Technical Data

Optical Data	
Working Range	12...18 mm
Working Distance	15 mm
Resolution	20 Gray Scale
Switching Hysteresis	< 2 %
Light Source	White Light
Wave Length	400...700 nm
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Light Spot Diameter	1,5 × 2,5 mm


Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24 V)	< 30 mA
Switching Frequency	5 kHz
Response Time	100 μs
Off-Delay	20 ms
Off-Delay (RS-232)	0...2 s
Temperature Drift	< 2 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2,5 V
NPN Switching Output/Switching Current	100 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Lockable	yes
Teach Mode	ZT, FT
Protection Class	III

Mechanical Data	
Adjustment	Teach-In
Housing Material	Plastic
Full Encapsulation	yes
Degree of Protection	IP67
Connection	M12 × 1; 4-pin


NPN NO/NC switchable	●
RS-232 with Adapterbox	●
Connection Diagram No.	352
Control Panel No.	M7
Suitable Connection Technology No.	2
Suitable Mounting Technology No.	360

Complementary Products


Adapterbox A232
Protection Housing Set ZSM-NN-02
Protection Housing ZSV-0x-01

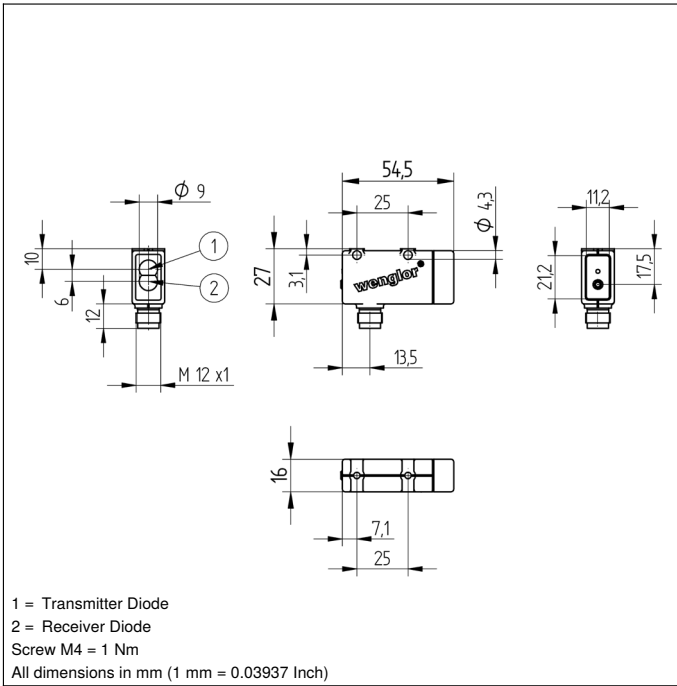


Ctrl. Panel




01 = Switching Status Indicator
 06 = Teach Button

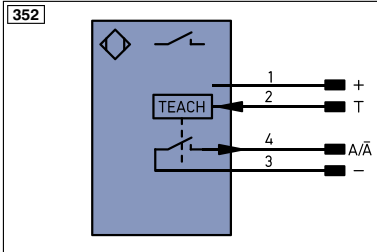

Legend

+	Supply Voltage +	PT	Platinum measuring resistor	ENa	Encoder A
-	Supply Voltage 0 V	nc	not connected	ENb	Encoder B
~	Supply Voltage (AC Voltage)	U	Test Input	AMn	Digital output MIN
A	Switching Output (NO)	U	Test Input inverted	AMax	Digital output MAX
Ā	Switching Output (NC)	W	Trigger Input	Aok	Digital output OK
V	Contamination/Error Output (NO)	O	Analog Output	SY In	Synchronization In
V̄	Contamination/Error Output (NC)	O-	Ground for the Analog Output	SY OUT	Synchronization OUT
E	Input (analog or digital)	BZ	Block Discharge	Out	Brightness output
T	Teach Input	AW	Valve Output		
Z	Time Delay (activation)	a	Valve Control Output +		Wire Colors according to DIN IEC 757
S	Shielding	b	Valve Control Output 0 V	BK	Black
RxD	Interface Receive Path	SY	Synchronization	BN	Brown
TxD	Interface Send Path	E+	Receiver-Line	RD	Red
RDY	Ready	S+	Emitter-Line	OG	Orange
GND	Ground	±	Grounding	YE	Yellow
CL	Clock	SrR	Switching Distance Reduction	GN	Green
E/A	Output/Input programmable	Rx +/-	Ethernet Receive Path	BU	Blue
	IO-Link	Tx +/-	Ethernet Send Path	VT	Violet
PoE	Power over Ethernet	Ex	Interfaces-Bus A(+)/B(-)	GY	Grey
IN	Safety Input	La	Emitted Light disengageable	WH	White
OSSD	Safety Output	Mag	Magnet activation	PK	Pink
Signal	Signal Output	RES	Input confirmation	GNYE	Green Yellow
M	Maintenance	EDM	Contacting Monitoring		

Ideal Working Distance

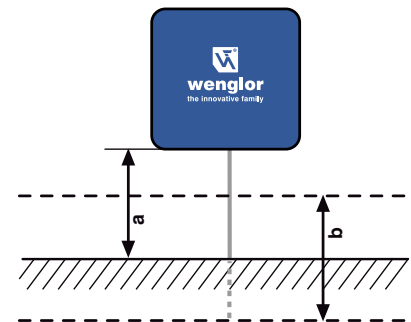

a = Working Distance
 b = Working Range

