

motor suppressor RC, 3x400...575VAC/4kW

3 × 400 V AC
 3 × 575 V AC
 RC

Image

- Mounting method
- on/in motor or distribution terminal box
- DIN-rail mountable TH35 (EN 60715)

Vicarious picture

Technical Data

Material	Flame retardant plastic acc. to (UL 94)
Potting compound	2-component epoxy
Temperature range	-20...+60 °C
Frequency	50...60 Hz

General data

Connection	approx. 200 mm, single cores 0.35 mm ² self-securing fork terminal ends M4
------------	---

Commercial data

Net weight	38
Weight unit	Gram
Basic unit	pc.
Customs tariff number	85363010
Unit (piece)	1
Minimum order quantity (piece)	1


Accessories

Control systems ASA DIN-rail mounting adapter	Art.-No. 20900
---	--------------------------

Comments

For DIN-rail mounting use 1 x Art.-No. 20900 adapter feet
 Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

Circuit diagram

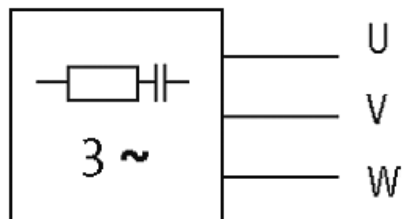

RC

Dimension drawing

