

MVP12, 8XM12, 4POLE, PLUGGABLE CABLE

15.0m PUR/PVC 16x0,34+5x0,75, w/o LEDs

8-way, 5-pole


PUR/PVC

15.0 m


Potential separation as option

[Link to Product](#)

Illustration

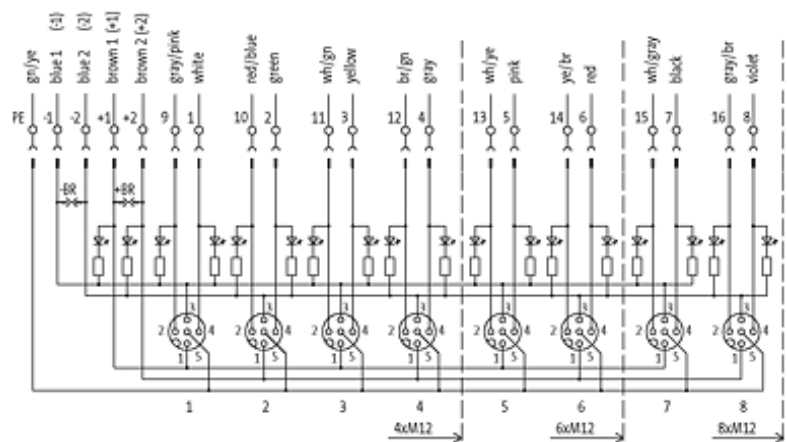

M12 Females 5-pole

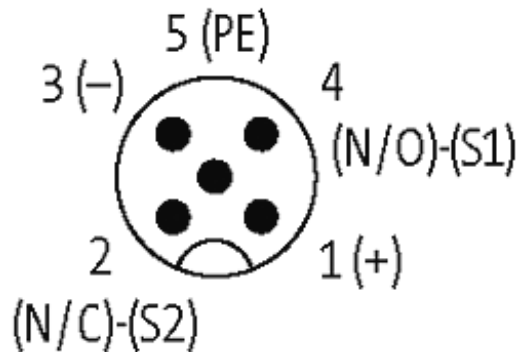

Product may differ from Image

Approvals



Contact layout

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
LED display	LED (green): Power / LED (yellow): (S1/S2)

Technical Data

Operating voltage	24 V DC
Operating current per contact	max. 4 A
Signal per port	2
Total current	max. 2 × 8 A
Housing	Plastic, flame retardant
Protection	IP67 inserted and tightened (EN 60529)
Locking of ports	Screw thread M12 × 1 mm

Cables

Cable number	374
No./diameter of wires	8×0.34 + 5×0.75 mm ²
Wire isolation	PVC
C-track properties	1.5 Mio.
Jacket Color	gray
Shore hardness outer jacket	85 ± 5A

Material (jacket)	PUR/PVC
Outer Ø	approx. 9.2 mm
Bend radius (fixed)	10 × outer Ø
Bend radius (moving)	12 × outer Ø
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-30...+80 °C

General data

Temperature range	-20...+80 °C
Dimensions H × W × D	149.2×50.2×17.2 mm

Commercial data

country of origin	CZ
customs tariff number	85444290
minimum order quantity	1