


MVP12, 6XM12, MOSA, PLUGGABLE CABLE



10.0m PUR-JB 12x0,34+5x0,75

6-way, 5-pole, MOSA
 quick connection elements included
 PUR/PVC (UL/CSA)
 10.0 m
 potentially separated
 with LED for digital PNP-signals 24 V DC

[Link to Product](#)

Illustration

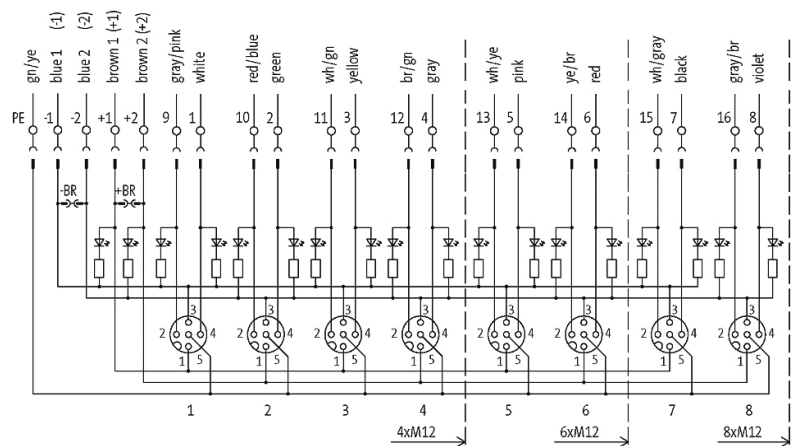



for 2 signals per port

Product may differ from Image

Contact layout

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
LED display	LED (green): Power / LED (yellow): (S1/S2)

Cables

Cable number	392
No./diameter of wires	12×0.34 + 3×0.75 mm ²
Strands per wire × Ø	PVC
C-track properties	1.5 Mio.
Jacket Color	gray
Shore hardness outer jacket	85 ± 5A
Material (jacket)	PUR/PVC
Outer Ø	approx. 10.0 mm
Bend radius (fixed)	7.5 × outer Ø
Bend radius (moving)	12 × outer Ø
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+60 °C

General data

Temperature range	-20...+80 °C
Dimensions H × W × D	43×50.2×122 mm

Technical Data

Operating voltage	24 V DC
Signal per port	2

Operating current per contact	max. 4 A
Total current	max. 2 × 8 A
Connection cross section	0.25...0.5 mm ²
Locking of ports	Cap nut
Housing	Plastic, flame retardant
Protection	IP67 inserted and tightened (EN 60529)

Commercial data

country of origin	DE
customs tariff number	85369010
minimum order quantity	1