

stay connected

# MVP12, 8XM12, MOSA, PLUGGABLE CABLE

15.0m PUR-JB 16x0,34+5x0,75


8-way, 5-pole, MOSA quick connection elements included PUR/PVC 15.0 m potentially separated with LED for digital PNP-signals 24 V DC

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

## **Link to Product**


#### Illustration




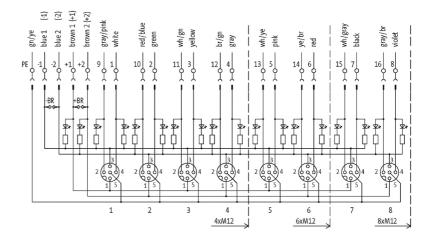



stay connected





for 2 signals per port

### Product may differ from Image

Contact layout	
PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
LED display	LED (green): Power / LED (yellow): (S1/S2)
Cables	
Cable number	404
No./diameter of wires	16×0.34 + 5×0.75 mm²
Wire isolation	PVC
C-track properties	1.5 Mio.
Jacket Color	gray
Material (jacket)	PUR/PVC
Outer Ø	approx. 12.5 mm
Bend radius (fixed)	10 × outer Ø
Bend radius (moving)	12 × outer Ø
Temperature range (fixed)	-30+80 °C
Temperature range (mobile)	-30+80 °C
Technical Data	
Operating voltage	24 V DC
Signal per port	2
Operating current per contact	max. 4 A
Total current	max. 2 × 8 A
Connection cross section	0.250.5 mm <sup>2</sup>
Locking of ports	Cap nut
Housing	Plastic, flame retardant



## stay connected

Protection	IP67 inserted and tightened (EN 60529)
General data	
Temperature range	-20+80 °C
Dimensions H × W × D	43×50.2×170 mm
Commercial data	
country of origin	DE
customs tariff number	85369010
EAN	4048879057554
eClass	27279219
minimum order quantity	1