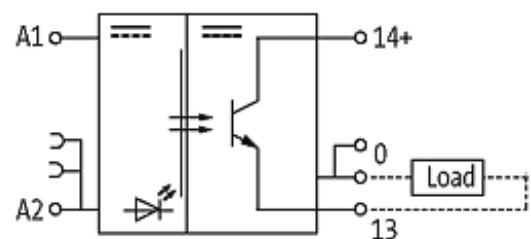





**AMMDS 10-44/1 OPTO-COUPLER MODULE**

IN: 35 VDC - OUT: 35 VDC / 0.2 A

Transistor 0.2 A  
24 V DC  
with minus plug link  
Double terminals on the output side  
for rapid switching

[Link to Product](#)**Illustration**

stay connected

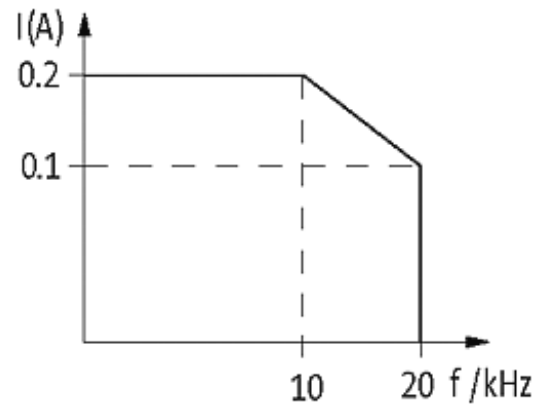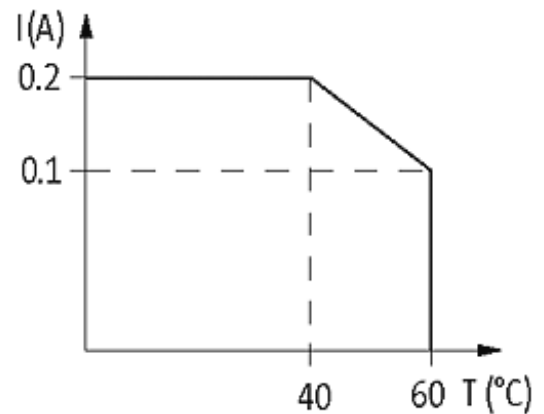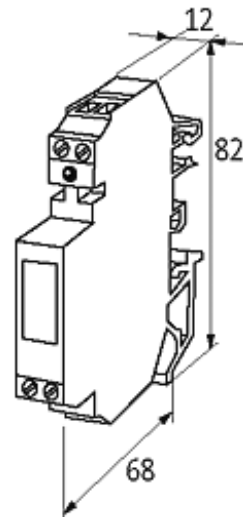

Product may differ from Image

### Input

Voltage range ON	10...35 V DC
Voltage range OFF	0...5 V DC
Input current	10 mA
LED display	LED (red)
Plug link (supplied)	Art.-Nr. 90960

### General data

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 02/15

Murrelektronik GmbH | Falkenstraße 3, 71570 Oppenweiler | Fon +49 (71 91) 47-0, Fax +49 (71 91) 47-491000 | shop@murrelektronik.de | shop.murrelektronik.de

Test isolation voltage	2.5 kV
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C

**Output**

Switching voltage	5...35 V DC
Switching current per output	1 mA...0.2 A
Saturation voltage (across output)	max. 0.5 V DC
Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	20/14 µs
Switching frequency	max. 20 kHz/200 Hz (resist./ind.)

**Commercial data**

country of origin	CZ
customs tariff number	85414090
minimum order quantity	1