

**RMMDU 11/24 output relay IN: 24 VDC - OUT: 250 VAC/DC / 8 A**

1 relay; 1 NO/NC contact  
8 A  
24 V DC  
with minus plug link

**Image**

- Safe separation (IEC 61140/EN 61140)

Vicarious picture

**Switching capacity (EN 60947-5-1)**

AC-1	8 A (24 V AC; 110 V AC; 230 V AC)
AC-15	3 A (24 V AC; 110 V AC; 230 V AC)
DC-13	2.5 A (24 V DC); 0.4 A (110 V DC); 0.3 A (230 V DC)

**Input**

Connection voltage - current	24 V DC ( $\pm 10\%$ - 17 mA)
Plug link (supplied)	Art.-Nr. 90960
LED display	LED (red)

**Output**

Switching voltage	max. 250 V AC/DC
Switching current per output	max. 6 A
Min. load current	100 mA
Power rating (voltage dependent)	max. 2000 VA/240 W
Switching frequency	max. 10 Hz
Contact material	Ag Ni
Energize/release/contact bounce time	10/15/2 ms

**General data**

Mech./ elect. life	20.000.000 switching cycles/load dependent
Test isolation voltage	5 kV
Temperature range	-20...+50 °C
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)

**Commercial data**

Net weight	40
Weight unit	Gram
Basic unit	pc.
Customs tariff number	85364900
Unit (piece)	1
Minimum order quantity (piece)	1


**Switching element**

NO/NC

**Comments**

Safe separation (IEC 61140/EN 61140)

## Circuit diagram

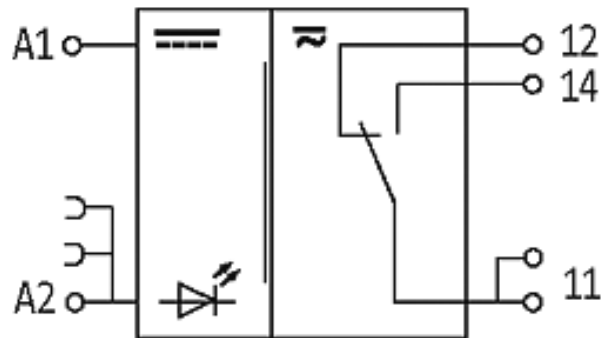

## Dimension drawing

