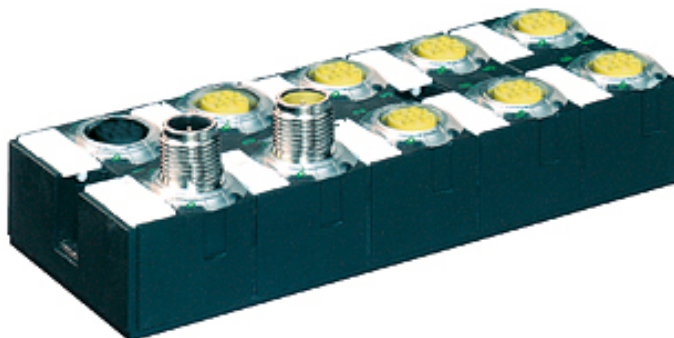


Cube67 I/O extension module 12 digitale, safety outputs

Expansion module - Safety
DO6/DO6 - (E) 6xM12 (K3)

Image

Vicarious picture

Internal communication	
Module supply	via internal system connection (max. 2x4 A)
Current consumption	max. 50 mA
LED display	US: sensor supply and internal supply voltage (green: OK); UA: actuator supply (green: OK)
Output	
Actuator supply UA	24 V DC (EN 61131-2), 2 circuits, (max. 2 x 4 A)
Switching current per output	max. 1.6 A (short-circuit and overload protected)
Diagnostic	
Communication status	via LED
Diagnostic via LED	per module and channel
Diagnostic via BUS	per module and channel
Monitoring - under voltage	yes
Monitoring - no voltage	yes
Short circuit and overload	yes
Actuator warning	per channel via LED and BUS
General data	
Protection	IP67
Temperature range	0...+55 °C (storage temperature -20...+70 °C)
Mounting method	2-hole screw mounting
Commercial data	
Net weight	240
Weight unit	Gram
Basic unit	pc.
Customs tariff number	85176200
Unit (piece)	1
Minimum order quantity (piece)	1
Comments	
For connection cables please see chapter "Connection Technology"	
All housings are fully potted	

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 04/14

Dimension drawing

