


Product may differ from Image

Approvals

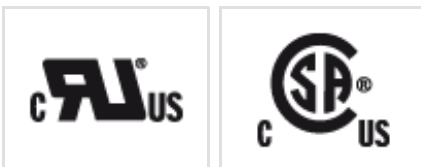

Utilization category

AC-12	6 A (24/110/230 V AC)
AC-15	3 A (24/110/230 V AC)
DC-13	1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC)

Input

Input voltage	24 V DC (+10 -15 %) input A
Input current	20 mA (input A)

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 02/15

Control voltage	24 V DC (+10 -15 %) input B
-----------------	-----------------------------

Control current	5 mA (input B)
-----------------	----------------

General data

Mech./ elect. life	20.000.000 switching cycles/load dependent
--------------------	--

Test isolation voltage	4 kV; safe separation (EN 60947-1)
------------------------	------------------------------------

Mounting method	DIN-rail mountable (EN 60715)
-----------------	-------------------------------

Temperature range	0...+55 °C
-------------------	------------

Output

Output voltage	max. 250 V AC/DC
----------------	------------------

Output current	max. 6 A
----------------	----------

Min. load current	100 mA (12 V DC)
-------------------	------------------

Output rating	max. 1500 VA/120 W
---------------	--------------------

Switching frequency	max. 10 Hz
---------------------	------------

Contact material	Ag Sn O ₂
------------------	----------------------

Energize/release/contact bounce time	10/15/1.5 ms
--------------------------------------	--------------

Commercial data

country of origin	CZ
-------------------	----

customs tariff number	85364900
-----------------------	----------

minimum order quantity	1
------------------------	---