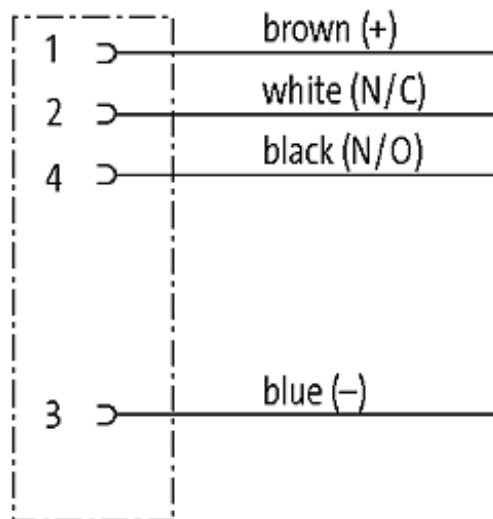
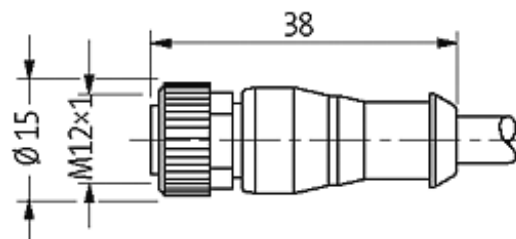


M12 FEMALE 0°

PVC 4X0.34 black UL/CSA 2m

[Link to Product](#)**Illustration**

Product may differ from Image

Approvals

* only for products with UL/CSA approved cable

Technical Data

Operating voltage max. 250 V AC/DC

Operating current per contact max. 4 A

Screw thread M12 x 1 mm (recommended torque 0.6 Nm) self

stay connected

Locking of ports	Screw thread M12 x 1 mm (recommended torque 0.6 Nm) self-securing
Protection	IP67 inserted and tightened (EN 60529)
Temperature range	-25...+85 °C, depending on cable quality

Form

12221

Cable

No./diameter of wires	4 x 0.34 mm ²
Wire isolation	PVC (br, wh, bl, bk)
Jacket	PVC (UL/CSA)
Outer diameter	approx. 5.0 mm
Bend radius (moving)	10 x outer diameter
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+80 °C

Commercial data

country of origin	DE
customs tariff number	85444290
minimum order quantity	1