



MSUD VALVE PLUG FORM A 18MM

PVC 3X0.75 GRAY, 3m

MSUD
Form A (18 mm)
110 V AC/DC $\pm 10\%$
LED and suppression

[Link to Product](#)

Illustration

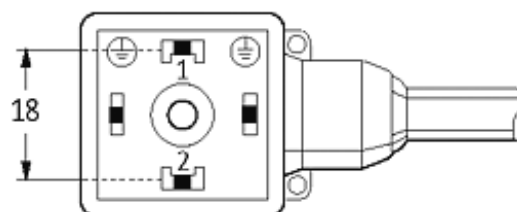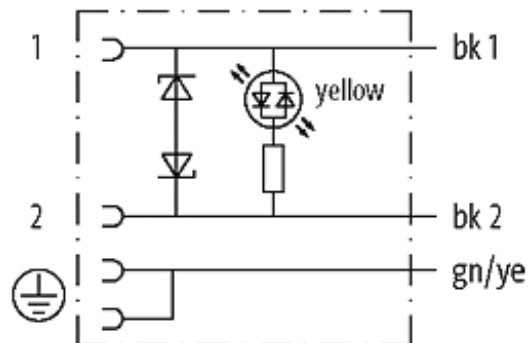



Product may differ from Image

Approvals



Form

Form 18041

Cables

Cable number	216
No./diameter of wires	3 × 0.75 mm ²
Wire isolation	PVC (bk num, gnye)
Jacket Color	gray
Material (jacket)	PVC
Outer Ø	approx. 5.9 mm
Bend radius (moving)	10 × outer Ø
Temperature range (fixed)	-30...+70 °C
Temperature range (mobile)	-5...+70 °C
	216
Cable type	1 (PVC)
	CE conform
	63,80
	0.2 mm
	3 × 0.75 mm ²
	PVC
	43 ±5 D
Wire-Ø incl. isolation	approx. 1.8 mm
Material (jacket)	PVC
Shore hardness (jacket)	80 ±5 A
	approx. 5.9 mm
Nominal voltage	300 / 500 V AC
	3000 V AC
Temperature range (fixed)	-30...+70 °C

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/17

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.de | shop.murrelektronik.de

Temperature range (mobile)	-5...+70 °C
Bend radius (fixed)	5 × outer Ø
Bend radius (moving)	10 × outer Ø

Technical Data

Operating voltage	110 V AC/DC ±10%
Operating current per contact	max. 4 A
Switch off peak	max. 250 V
Switch off delay time	max. 20 ms
Locking of ports	M3 (recommended torque 0.4 Nm)
Housing	Black plastic (gray on request)
Protection	IP66K, IP67 inserted and tightened (EN 60529)

General data

Temperature range	-25...+85 °C, depending on cable quality
-------------------	--

Commercial data

country of origin	CZ
customs tariff number	85444290
EAN	4048879193207
eClass	27279218
minimum order quantity	1