



## SVS VALVE PLUG FORM A 18MM FIELD-WIREABLE


230V LED+VDR PG9

Form A (18 mm)  
230 V AC/DC with LED and VDR  
PG9 (SW19)

### [Link to Product](#)

#### Illustration

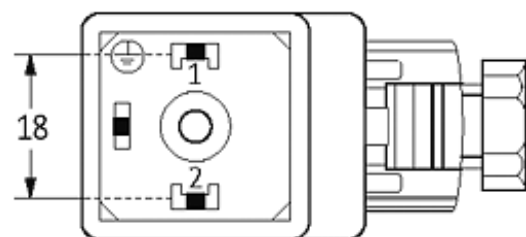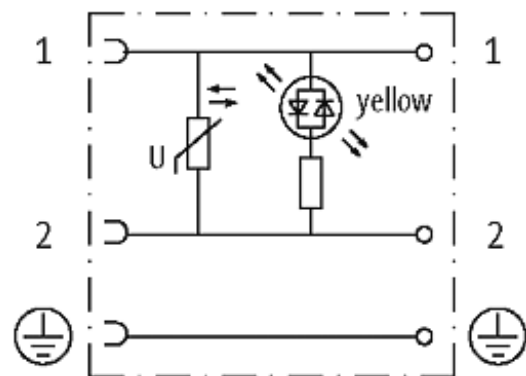

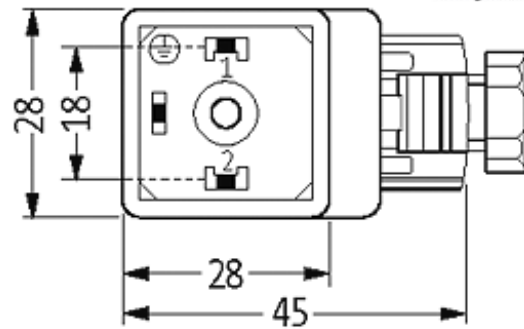*stay connected*

Height: 41 mm

Product may differ from Image

### Approvals



### Form

Form 29181

### Technical Data

|                               |   |
|-------------------------------|---|
| Operating voltage             | 230 V AC/DC $\pm 10\%$  |
| Operating current per contact | max. 1 A  |
| Switch off peak               | max. 533 V  |
| Max. power (W)                | max. 100 W(VA)  |
| Connection cross section      | 4 mm <sup>2</sup> single core, with ferrule end 1.5 mm <sup>2</sup> |
| Sealing range (cable Ø)       | 6...8 mm  |
| Locking of ports              | M3 (recommended torque 0.4 Nm)                                      |
| Compression gland             | PG9; (PG11, NPT 1/2" on request)                                    |
| Protection                    | IP65 inserted and tightened (EN 60529), with gland                  |

### General data

Temperature range -20...+60 °C

### Commercial data

|                        |          |
|------------------------|----------|
| country of origin      | CZ       |
| customs tariff number  | 85369010 |
| minimum order quantity | 1        |