

T coupler M12 male / M12 female

T-coupler

Male straight - female straight


M12 - M12, 5-pole



Distribution function (NO)

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

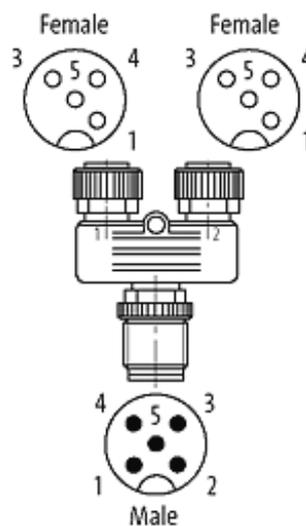

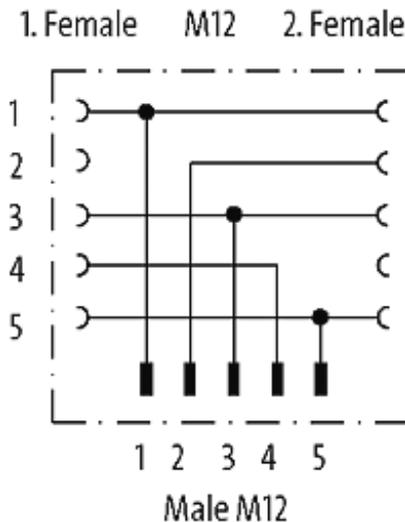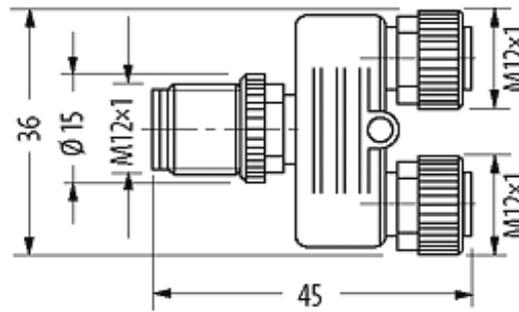

Product may differ from Image

Approvals



Form

Form 41121

Technical Data

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread M12 x 1 mm (recommended torque 0.6 Nm) self-securing
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Zinc die casting, matte nickel plated
Rated surge voltage	1.5 kV

General data

Temperature range -25...+85 °C

Commercial data

country of origin DE

customs tariff number	85366990
EAN	4048879144872
eClass	27143423
Packaging unit	1