


## ADAPTOR M12 MALE/ M8 FEMALE 4 POLE CONF. 1,2,3,4



### [Link to Product](#)

#### Illustration

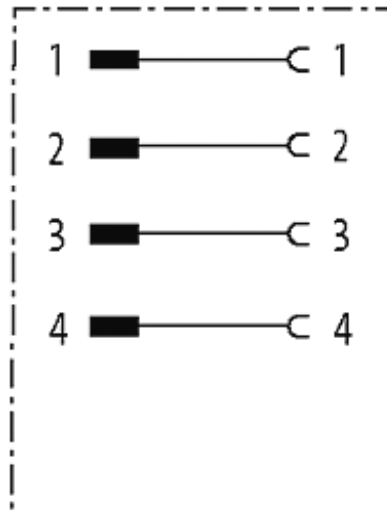

Male

Female

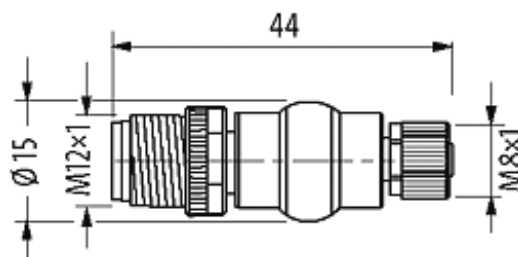

Product may differ from Image

**Form**

Form 42211

**Technical Data**

Operating voltage max. 30 V AC/DC

Operating current per contact max. 4 A

Material group IEC 60664-1, category I

Locking of ports Screw thread M8/M12 × 1 mm (recommended torque 0.4/0.6 Nm), self-securing

Compression gland M8 (SW9), M12 (SW13)

Protection IP67 inserted and tightened (EN 60529)

Locking material Zinc die casting, matte nickel plated

Material PUR

**General data**

Temperature range -25...+85 °C

Test isolation voltage 0.8 kVrms

Pollution Degree 3

**Commercial data**

country of origin DE

customs tariff number 85369010

EAN 4048879143196

eClass 27061801

minimum order quantity 1