

EXACT8, 8XM8, 3 POLE MOULDED CABLE

10.0m PUR 8x0,34+2x0,75, UL/CSA

8-way, 3-pole



PUR (UL/CSA), halogen free

10.0 m



Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)


Illustration

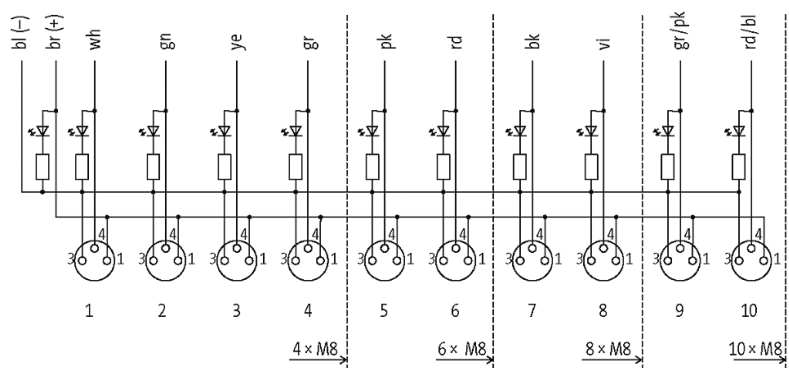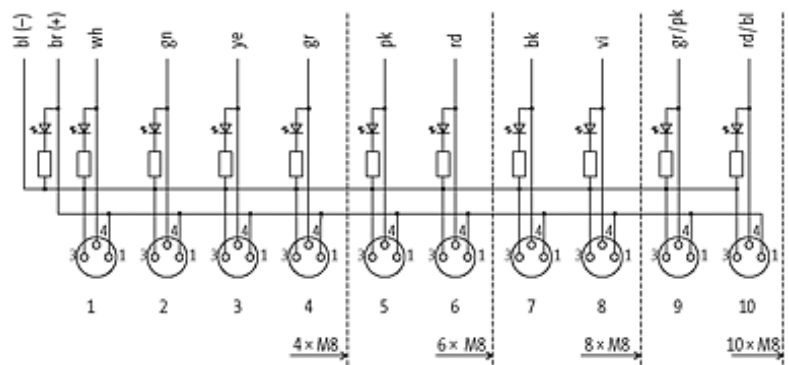

M8-Females 3-pole



for 1 signal per port

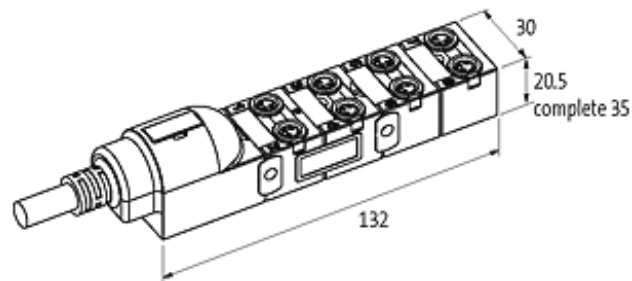

Product may differ from Image

Approvals



Technical Data

Operating voltage	24 V DC
Operating current per contact	max. 2 A
Signal per port	1 - (31-32)
Protection	IP65/IP67
Housing	Plastic, flame retardant
Total current	max. 8 A
Locking of ports	Screw thread M8 × 1 mm

Cables

Cable number	359
No./diameter of wires	8×0.34 + 2×0.75 mm ²
C-track properties	5 Mio.
Jacket Color	gray
Shore hardness outer jacket	89 ± 5A

Material (jacket)	PUR (UL/CSA)
Outer diameter	approx. 9.2 mm
Bend radius (fixed)	5 × outer Ø
Bend radius (moving)	10 × outer Ø
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-5...+60 °C

General data

Temperature range	-20...+80 °C, depending on cable quality
-------------------	--

Contact layout

Contact 1	(+)
Contact 3	(-)
Contact 4	(NO)/(S1)
LED display	LED (green): Power / LED (yellow): (S1)

Commercial data

country of origin	DE
customs tariff number	85444290
minimum order quantity	1