

EXACT12, 8XM12, 4 POLE, CON. M23 12 POLE




Without con. cable


8-way, 4-pole
M23 plug connection
12-pole used
with LED for digital PNP-signals 24 V DC

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.


[Link to Product](#)

Illustration

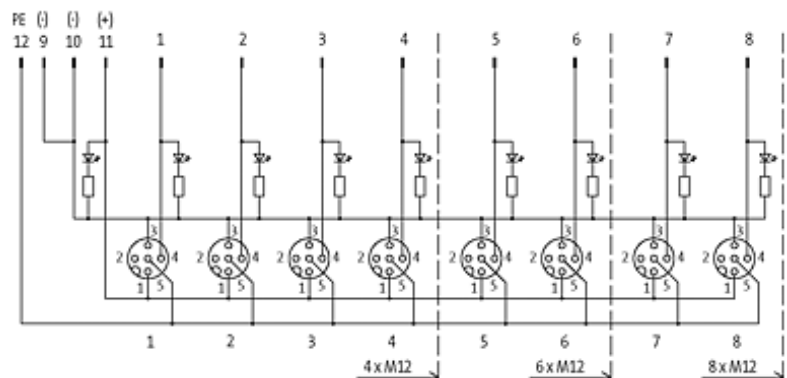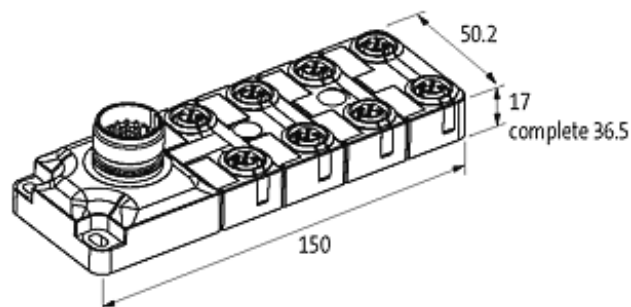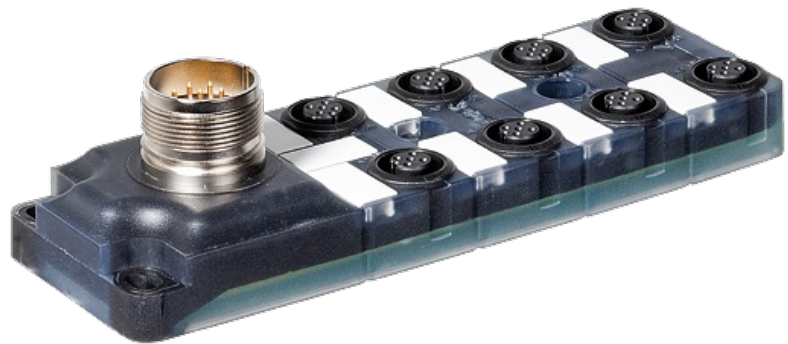


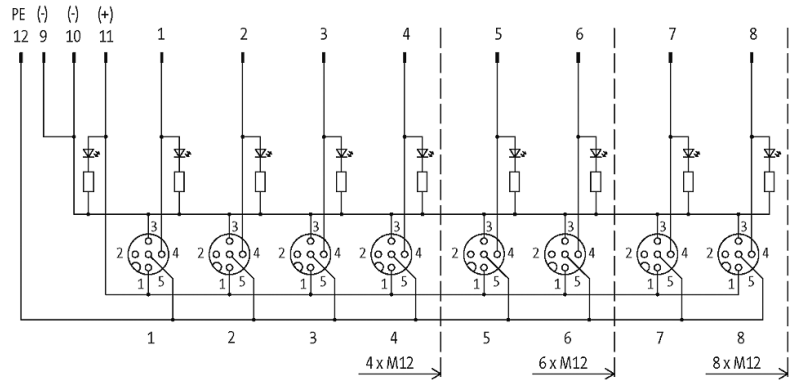


M12-Females 4-pole



M23-Plug 12-pole




for 1 signal per port

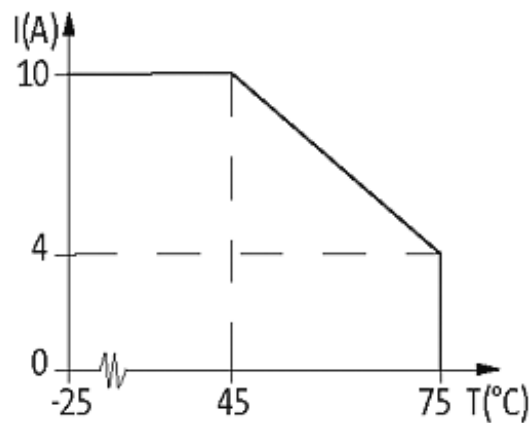

Product may differ from Image

Approvals



General data

Temperature range -20...+75 °C

Technical Data

Operating voltage 24 V DC

Operating current per contact max. 4 A

Total current max. 8 A

Protection IP65/IP67

Housing Plastic, flame retardant

Contact layout

Contact 1 (+)

Contact 3 (-)

Contact 4 (NO)/(S1)

Contact 5 (Earth)

Commercial data

country of origin DE

customs tariff number 85369010

minimum order quantity 1