

MB Cap Ultra buffer modul IN: 24VDC OUT:24VDC/20A for max.16s

INPUT: 24 V DC (SELV/PELV)

OUTPUT: max. 20 A

Buffer time: 16 s

Image


Vicarious picture

Input	
Input voltage	24...26.4 V DC
Input current	20 A
Inrush current	max. 36.5 A
Loading time	typ. 40 s; max. 500 s
Output	
Output voltage	23.3 V DC $\pm 2\%$
Output current	max. 20 A (+60 °C)
Buffer time	16 s (20 A); 320 s (1 A)
General data	
Standards	(EN 60950-1), (EN 61204-3), (EN 55011 A)
Temperature range	-20...+60 °C (storage temperature -20...+60 °C)
Mounting method	DIN-rail mountable TH35-7.5/TH35-15 (EN 60715)
Efficiency	90 %
Commercial data	
Net weight	2200
Weight unit	Gram
Basic unit	pc.
Customs tariff number	85044090
Unit (piece)	1
Minimum order quantity (piece)	1

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 06/14

Circuit diagram

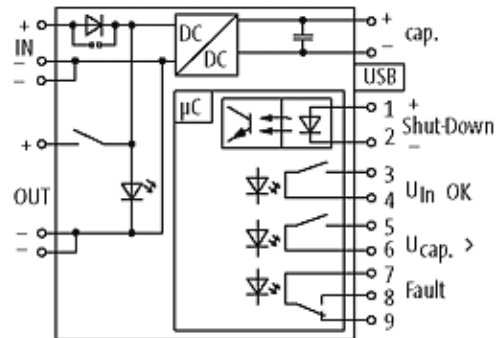

Dimension drawing

