


MCS POWER SUPPLY 3-PHASE,


IN: 360-550VAC OUT: 24-28V/5ADC

INPUT: 3 × 360...550 V AC

OUTPUT: 24...28 V DC

Current: 5 A

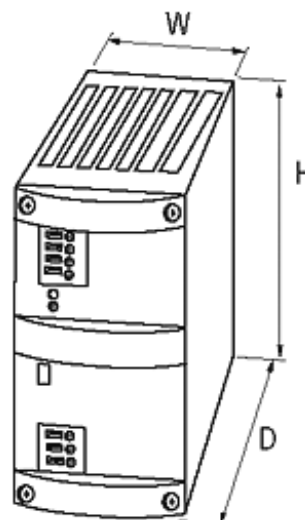[Link to Product](#)**Illustration**

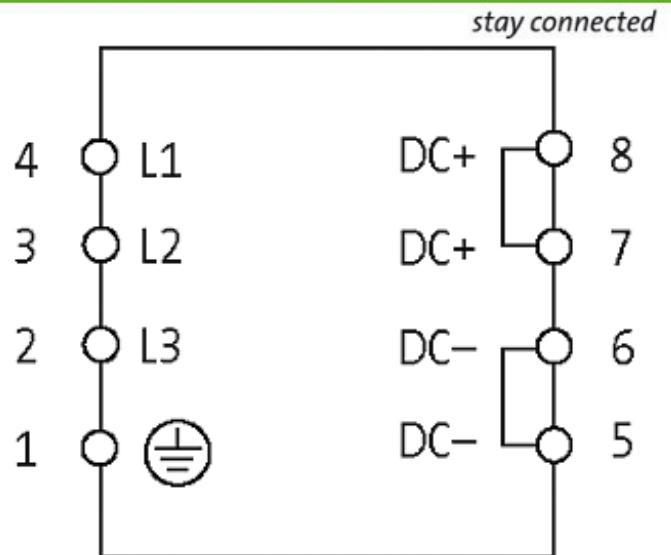

Product may differ from Image

Approvals



Input

| | |
|---------------------------|--------------------|
| Input voltage | 3 × 360...550 V AC |
| Input current | 3 × 0.33 A |
| Inrush current after 1 ms | max. 15 A |
| Primary fusing external | max. 3 × 2 A |
| Frequency | 50...60 Hz |

General data

| | |
|----------------------|---|
| Standards | EN 60950-1, EN 61204-3, EN 55022 B |
| Relative humidity | 5...95%, no condensation |
| Efficiency | 90% |
| Dimensions H × W × D | 127×68×198 mm |
| Mounting method | DIN-rail mountable TH35 (EN 60715) |
| Temperature range | 0...+60 °C (storage temperature -25...+85 °C) |

Output

| | |
|-----------------------------|---|
| Output voltage | 24 V DC (SELV), ±1%; 24...28 V adjustable |
| Output current | 5 A (+60 °C); 6 A (+40 °C) |
| Mains failure bridging time | min. 25 ms (400 V AC) |
| Ripple | max. 20 mVrms |
| Unit protection | short-circuit and overload protected |
| Spikes | max. 100 mV p-p |
| LED display | LED (green) for output voltage |
| Selectable switch-off mode | front sided plug link (automatic re-start or definite shut-off) |

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/18

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.de | shop.murrelektronik.de

Parallel usage/serial usage max. 5 units/max. 2 units

Commercial data

| | |
|-----------------------|---------------|
| country of origin | CZ |
| customs tariff number | 85044090 |
| EAN | 4048879076067 |
| eClass | 27049002 |
| Packaging unit | 1 |