

MICO BASIC 8.4

MICO BASIC 8.4
8 channels
Current adjustment 4 A

Image

- Fire protection (EN 60950-1)
- Operating voltage protection (EN 61131-2)

Vicarious picture

Technical Data

Operating voltage	24 V DC (18...30 V DC)
Current adjustment	4 A
Group alarm output	max. 20 mA; high: all channels ON; low: not all channels ON
Inrush capacity	max. 20 mF (per channel)
Remote start (ON)	10...30 V DC
Impulse length	min. 20 ms

General data

Input terminals	1 × 16 mm ²
Output terminals	per output 1 × 4 mm ²
Alarm terminals	2.5 mm ²
Bridging concept	one side, with spring clamp terminals or bridge set (max. 40 A)
Temperature range	0...+55 °C (storage temperature -40...+80 °C)
Connection	Spring clamp terminals
Mounting method	DIN-rail mountable TH35 (EN 60715)


Commercial data

Net weight	160
Weight unit	Gram
Basic unit	pc.
Customs tariff number	85363010
Unit (piece)	1
Minimum order quantity (piece)	1

Functions

Intelligent current monitoring	
Signal contact	

Circuit diagram

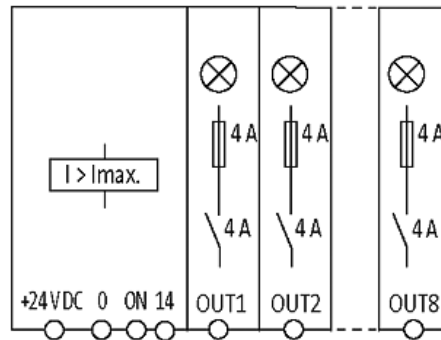

Dimension drawing

