

**motor suppressor RC, 3x400...575VAC/4kW**

3 × 400 V AC  
 3 × 575 V AC  
 RC

**Image**

- Mounting method
- on/in motor or distribution terminal box
- DIN-rail mountable TH35 (EN 60715)

Vicarious picture

**Approvals****Technical Data**

Material	Flame retardant plastic acc. to (UL 94)
Potting compound	2-component epoxy
Temperature range	-20...+60 °C
Frequency	50...60 Hz

**General data**

Connection	approx. 200 mm, single cores 0.35 mm <sup>2</sup> self-securing fork terminal ends M4
------------	---

**Commercial data**

Net weight	38
Weight unit	gram
Basic unit	pc.
Customs tariff number	85363010
Unit (piece)	1
Minimum order quantity (piece)	1

**Accessories**


Control systems ASA DIN-rail mounting adapter

**Art.-No.**  
20900

**Comments**

For DIN-rail mounting use 1 x Art.-No. 20900 adapter feet  
 Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

## Circuit diagram

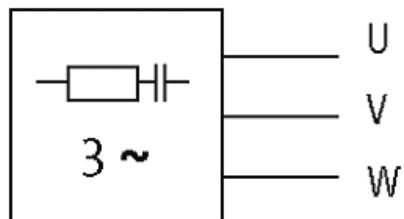

RC

## Dimension drawing

