

MOSA M12 FEMALE 0° FIELD-WIREABLE (IDC)4-pol., 0,14-0,34mm²

Female straight

4-pole



Connection cross section: 0.14...0.34 mm²

The resistance to aggressive media should be individually tested for your application.
Further details on request.

[Link to Product](#)**Illustration**

Female



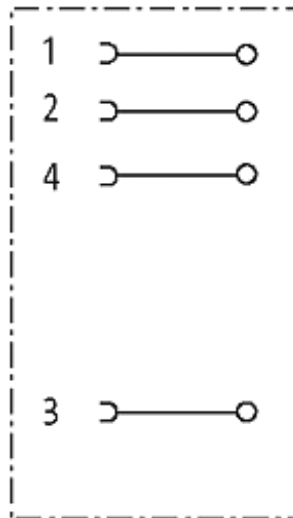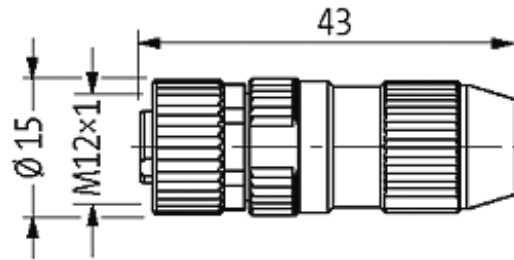

Product may differ from Image

Approvals



Technical Data

Operating voltage	max. 32 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	0.14...0.34 mm ² (conductor diameter min. 0.1 mm)
Sealing range (cable diameter)	2.9...5.1 mm
Wire isolation	PVC, PP, TPE
Outer wire diameter	1.0...1.6 mm
Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing
Protection	IP67 inserted and tightened (EN 60529)

Form

12611

General data

Temperature range	-25...+85 °C
-------------------	--------------

Commercial data

country of origin	DE
customs tariff number	85369010
minimum order quantity	1